

# Pleated Elements for Bag House Filters

Our pleated elements are used as a final filter stage in micronizer bag houses at the end of the titanium dioxide pigment extraction process. They can be used in any high temperature filtration application ( $\leq 260\text{ }^{\circ}\text{C}$  /  $500\text{ }^{\circ}\text{F}$ ).



## Product Features

### Sefar filter solutions for Bag House Filters

Our pleated elements for bag house filters offer an increased filtration area and provide an improved filtration efficiency compared to conventional filter bags of the same diameter. Sefar X-series is dedicated for the use in demanding, high temperature applications such as drying, micronizing and oxidation in the titanium dioxide pigment beneficiation process.

## DOWNLOADS

Brochure: Process Filtration (PDF 5300 kb)

### Fabrication solutions

The X-600 is a unique, patented, pleated filter used in finishing of titanium dioxide pigment and other applications.

It surpasses the performance of any regular bags on the market and can increase service life by more than 100%. Outstanding results of 54 months have been shown for product lifetime. This represents the longest lifetime for any micronizer bag house lifetime in the world.

This success is mainly due to a heavy duty assembly, using the Sefar patented aluminum potting system to seal the end caps. The larger surface area from the pleats of the X-600, as compared to conventional bags, allows for significantly increased productivity and lifetime.

### Pleated Cartridge X-600


#### Sefar Filter Pure (Pty) Ltd

Postnet Suite #242  
 Private Bag X18  
 North Riding, 2162  
 South Africa

Phone +27 11 708 2485/6/7  
 Fax -

[shawn@sefarfilterpure.com](mailto:shawn@sefarfilterpure.com)

[Go to content](#)

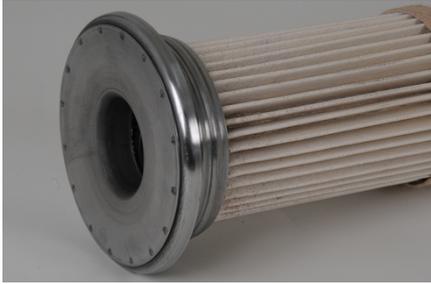


- Increased air flow and superior efficiency

### Filter media technology

The new pleated cartridges resist high temperatures and have almost three times the surface area of other filter bags of the same diameter. In addition to providing increased air flow and superior efficiency, the pleated cartridges can replace old filters with no system modifications required.

### X-600 High-temperature pleated cartridges

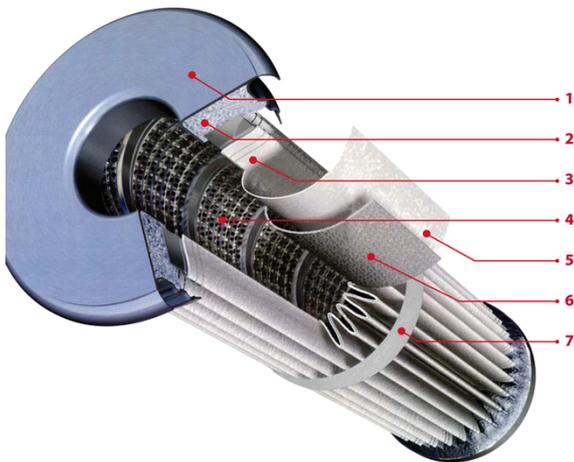

- 1 100 % metal top and end caps
- 2 Ultra-resistant aluminum sealing
- 3 Sealed stitching

#### Sefar Filter Pure (Pty) Ltd

Postnet Suite #242  
 Private Bag X18  
 North Riding, 2162  
 South Africa

Phone +27 11 708 2485/6/7  
 Fax -

[shawn@sefarterfilterpure.com](mailto:shawn@sefarterfilterpure.com)

[Go to content](#)

- 4 Galvanized steel core
- 5 e-PTFE membrane
- 6 Fiberglass felt with  
type A phenolic resin
- 7 Heavy duty stainless  
steel bands



## CONTACT

- Local contact
- Contact form
- Send mail

Please call us for further information:  
Phone CH: +41 71 898 5700

## Locations



### Sefar Filter Pure (Pty) Ltd

Postnet Suite #242  
Private Bag X18  
North Riding, 2162  
South Africa  
Phone: +27 11 708 2485/6/7  
Fax: -

■ E-Mail

### Sefar Filter Pure (Pty) Ltd

Postnet Suite #242  
Private Bag X18  
North Riding, 2162  
South Africa

Phone +27 11 708 2485/6/7  
Fax -

[shawn@sefarfilterpure.com](mailto:shawn@sefarfilterpure.com)

[Go to content](#)